



SINGAPORE
MALAYSIA
INDONESIA
MYANMAR
THAILAND
CAMBODIA

enquiry@averasia.com
www.averasia.com



Scan QR code
for a sales enquiry



Floodlight 4x240W LED
140,000 total lumens
individually adjustable lamps



Galvanized 5,5 meters mast
with manual winch and
coiled-cable collector



Galvanized steel push lever
double ergonomic handle
vertical position return (spring)



Solid rubber twin-wheels
with wheels safety brake



Lamp Switches sealed in
IP67 protected box



16A CEE plug standard
multi "genset" docking-bay



Trolley base, made of steel
and powder coated



2 x side stabilizers
retractable stabilizers
foldable knob



SINGAPORE
MALAYSIA
INDONESIA
MYANMAR
THAILAND
CAMBODIA

enquiry@averaasia.com
www.averaasia.com



Scan QR code
for a sales enquiry

MT2

MT2 light tower

The **MT2** is a brand-new lighting tower equipped with 4x240W high-efficiency LED floodlights. It's one of the smallest mobile lighting towers of the Generac Mobile® range.

Optional generators

The MT2 can be equipped with two different build-in generating set: 4kVA Yanmar diesel-driven or 5kVA Honda petrol-driven.

Easy handling

Thanks to the practical manual hand trolley and the light weight, a single operator can handle the MT2 quickly and safely in every kind of working area.



Picture shown may not reflect actual configuration.



SINGAPORE
MALAYSIA
INDONESIA
MYANMAR
THAILAND
CAMBODIA

enquiry@averasia.com
www.averasia.com



Scan QR code
for a sales enquiry

MT2



Picture shown may not reflect actual configuration.

MT2 - Y		Technical Data
Min. dimensions (mm) Length x Width x Height		1250 x 1060 x 1890
Max. dimensions (mm) Length x Width x Height		1460 x 1400 x 5200
Dry weight (kg)		315
Generator model available		P4500
Engine model		(Yanmar L70N)
Avg. sound pressure	dB(A)@ 7m	68
Total running time (h)	@75% PRP	16
Lifting system	M:Manual / H:Hydraulic	M
Wind speed resistance (km/h)		80
Lamps power (W)		4 x 240
Lamps type		G4 LED
Total lumen (Lm)		139200
Illuminated area (m ²)		2500
Alternator		4.1/220/50*
CEE outlet socket		32/220/50*
Schuko outlet socket		16/220/50*
Tank capacity (liters)		18

* Check 60 Hz version availability with local dealer or subsidiary

** Engine note: both EU Stage V and unregulated version available (50 Hz only)

aver asia

SINGAPORE
MALAYSIA
INDONESIA
MYANMAR
THAILAND
CAMBODIA


enquiry@averasia.com
www.averasia.com



Scan QR code
for a sales enquiry



Beam Angle: 60°
Lumen output: 147 lm/W

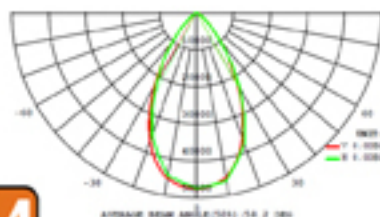

G4
240

Beam Angle: 60°

Dimensions:
405x398x106 mm

Without driver:
405x398x85 mm

Supply wattage:
240W @ 48 Vdc

Color Temperature:
5028 Kelvin

IP: 65
Operating Temperature:
-40°C +49°C

Expected life: 50000h
Warranty: 2 years

Lumen output:
34.800 lm (each)

Wider beam angle, assuring a bigger illuminated area

Higher efficiency and higher lumens output assures more light

Extended operating temperatures from -40°C to + 50°C

Front protective lenses with increased impact and wear resistance

Easy maintenance

Better accessibility and serviceability

Easy and safe anti-glare lens insertio

Tested, validated by Generac US laboratories, CSA certified

Multiple official certification: UL, CSA, EN

